



# CCU525

CAMERA CONTROL UNIT FOR MULTIPLE CCTV CAMERAS  
[ahlbergcameras.com/products/camera-control-units/ccu525](http://ahlbergcameras.com/products/camera-control-units/ccu525)



The CCU525 is a modular built camera control unit that powers and controls 2-6 cameras. It is steered by an external control system from third party suppliers that communicates with the CCU525 via Pelco

## MORE INFORMATION ABOUT CCU 525

### APPLICATIONS

- CCTV
- Under water inspections
- Hot Cell

### BENEFITS

- Camera control unit that supplies power and controls camera, pan&tilt and lighting
- The CCU is powered by 48VDC from site or by a separate 1U rack mounted power supply
- Flexible, powers and controls 2-6 cameras
- Easy and versatile control through remote or external systems using Pelco D protocol
- Fits on a 19" rack

## SPECIFICATIONS

### PHYSICAL CHARACTERISTICS

|                  |          |
|------------------|----------|
| Width            | 483 mm   |
| Length           | 435 mm   |
| Height           | 133 mm   |
| Weight           | 8 kg     |
| Housing material | Aluminum |

### ENVIRONMENTAL TOLERANCES

|                       |             |
|-----------------------|-------------|
| Operating Temperature | 0°C to 45°C |
|-----------------------|-------------|

### POWER

|              |       |
|--------------|-------|
| Power Supply | 48VDC |
|--------------|-------|

### OUTPUTS


|               |                            |
|---------------|----------------------------|
| Video Outputs | Component HD, Composite SD |
|---------------|----------------------------|

### COMMUNICATION

|          |         |
|----------|---------|
| Protocol | Pelco D |
|----------|---------|

*We reserve the right to alter specifications without prior notice*

## CCU525 IMAGES

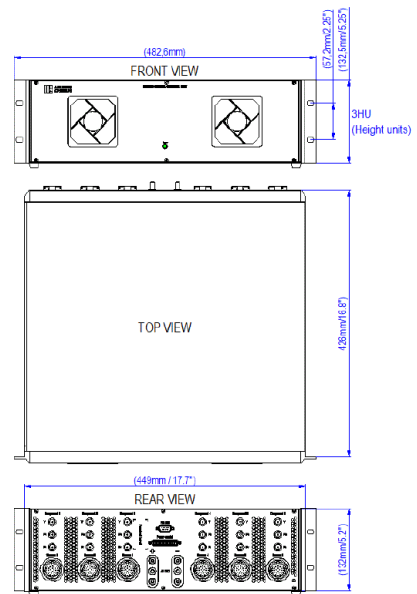

*We reserve the right to alter specifications without prior notice*